

## SKIOLD TROUGH AUGERS SYSTEM U 10 - 15 - 20

Capacity up to 100 m3 per hour
Length up to 45 m
ATEX approved gear motors, zone 22
Heavy duty augers with reinforced bolt connections
Galvanized trough with tight-fitting cover
Wide range of accessories




## SKIOLD TROUGH AUGER - U10/U15/U20

SKIOLD's trough augers are available in three sizes (U100, U150, U200) in galvanized material. They are suitable for horizontal transportation of meal, grain, granulate, and pellets. The trough augers are of strong quality which ensures long service life, even with many daily start-ups/stops and many operational hours.

The trough augers have a capacity of up to 50 tons/hour, max. length 45 meters, and are supplied with ATEX certified gear motor drive.

SKIOLD keeps a wide range of accessories to solve any transportation task.

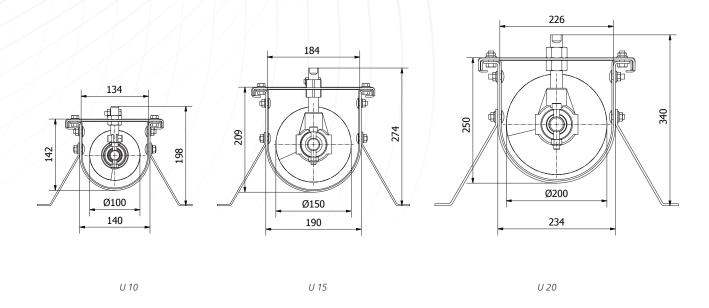

## **TECHNICAL SPECIFICATIONS**

ТҮРЕ	Max capacity m <sup>3</sup> /h	Max length m	Motor kW	Max rpm
U10	22	45	1.1 - 7.5	560
U15	48	35	1.1 - 7.5	320
U20	104	15	1.1 - 7.5	280

Capacity will vary for different products