



SKIOLD GRAIN CRUSHERS



SKIOLD MAKES THE DIFFERENCE!

SKIOLD GRAIN CRUSHERS KB160/KB300

Crushers for all purposes

Low power consumption

Large capacity range

Easy operation and adjustment

Crushing of all usual raw materials


Drive on two or three rollers

Efficient magnet separator at inlet

Compact construction with optimal operation security



SKIOLD GRAIN CRUSHERS KB160/KB300

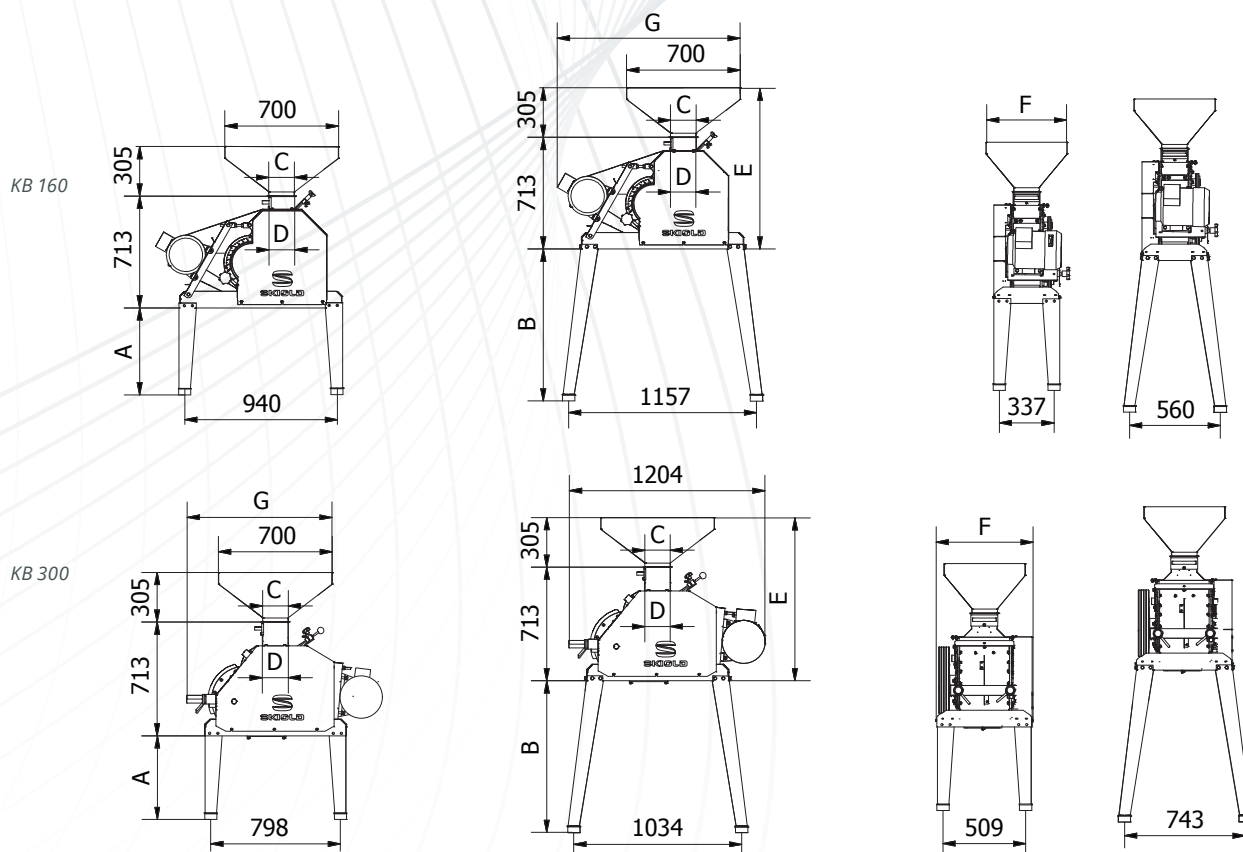

CAPACITIES*	KB 160-2	KB 160-3	KB 300-3
Barley (kg/h)	450-1000	650-1200	900-2000
Wheat (kg/h)	500-1100	700-1300	1100-2500
Oats (kg/h)	750-1500	950-1700	1300-3000
Maize (kg/h)		450-1100	1000-2100
Peas (kg/h)		400-1000	900-1700

* The capacity depends on the humidity of the raw material and the required crushing degree

TECHNICAL SPECIFICATIONS	KB 160-2	KB 160-3	KB 300-3
Noise level (dBa)	92-97	92-97	92-97
Number of rollers	2	3	3
Diameter of rollers (mm)	290	290	290
Width of rollers (mm)	160	160	300
Motor 1400 rpm (kW)	4	4	7,5
Weight with motor (kg)	255	260	460
Magnet in inlet	Yes	Yes	Yes

DIMENSIONS (mm)	KB 160-2	KB 160-3	KB 300-3
A) Outlet height short legs	530	530	530
B) Outlet height long legs	940	940	940
C) Inlet square Q	160	160	160
D) Outlet square Q	160	160	200
Incl. 50 litres inlet hopper	Yes	Yes	Yes
E) Total height without legs	1018	1018	956
F) Total width with hopper	500	500	554
G) Total length with hopper	900	900	1160