

UTX

U-TROUGH AUGER





# High Powered, High Capacity

AGI Hutchinson is dedicated to bringing the highest level of manufacturing quality and expertise to the agriculture industry. Through this commitment to innovation, AGI Hutchinson introduces the UTX U-Trough Auger.

The UTX Auger brings together innovations like Wear Edge Technology™ to extend the life of the flighting and powder coat paint to protect against and repel rust. AGI Hutchinson's UTX Auger features a completely enclosed driveline guard providing a cleaner, sleeker look while protecting your auger from the elements. Steel hydraulic lines with ORB fittings have been added to the new Self-Propelled Mover Kit to create a cleaner look while reducing the chance of leakage. We know farmers are looking for labor-saving, cost-effective upgrades to help make their work easier. AGI Hutchinson recognizes these needs and has added features like a removable tow bar to make connecting and detaching from the hitch easier than ever and a hydraulic winch to raise and lower the auger with ease and precision. AGI Hutchinson has also added an easily adjustable chain tensioner to help maintain the consistent chain drive tension. The top drive comes sealed with a durable cover and inside you'll find grease-lubricated, forged steel sprockets and a heavy-duty chain, designed to match your auger's capacity. For long, quiet operation, the driveshaft and bearings are constructed of durable oil impregnated hardwood and can be easily replaced without disassembling the driveshaft.

To further improve performance, AGI Hutchinson uses square one-bolt flight connections providing positive torque transfer. All UTX models come standard with triple banded belts to better maintain speed by providing improved tension with less slippage. AGI Hutchinson's UTX Truck Auger is a high performance, high capacity auger that's ready to help make your job easier and faster.




## Reversing Gearbox

Comes with shifting linkage and lockout, allowing the operator to safely reverse the auger at all angles.




## Self-Propelled Heavy-Duty Mover

Complete with all-wheel drive, standard hydraulic steering, and rugged all-terrain tires capable of handling tough terrain, this compact mover kit gives better access to large diameter hopper bins and a sharper turning radius.




Enclosed Driveline Guard



Triple Banded Belts



Adjustable Chain Tensioner



Steel Hydraulic Lines



### Collapsing Spring Loaded Hopper Extension


Quickly and easily fit under your lowest and hardest to reach bin unloads and hopper bins with this hopper extension.



### Powerful Gas Motor

The UTX comes complete with a powerful Vanguard gas motor and large 44-liter gas tank to help you work longer.

Heights measured from bottom of auger spout to ground.



A	9' 2"
B	13' 9"
C	18' 4"
D	14' 10"
E	15'
F	14' 7"
G	11'



### Work Lights

LED work lights provide enhanced lighting conditions when the sun has gone down.



### Triple-Groove Electric Clutch

Start and stop the auger without shutting down the gas engine drives.


### SPECIFICATIONS

TROUGH GAUGE	12 GA
TROUGH CONNECTORS	¼" Flange
MAIN FLIGHTING	10" OD x 7 GA stretched + welded
INTAKE FLIGHTING	10" OD x 7 GA welded with Wear Edge Technology™
FLIGHTING SHAFT	2" OD x 0.120" Wall tubing
DRIVESHAFT	1 ½" OD x 10 GA tubing
DRIVESHAFT BEARINGS	1 ½" Oil impregnated hardwood bearings
TRACK	High yield 11 GA roll formed
TRACK SHOE	2 ¾" Steel roller
UNDERCARRIAGE	3" Square tubing
AXLES	2 ½" Square tubing
HUB & WHEELS	4 Bolt agricultural type hubs, 15" wheel
LIFT CABLE	¼" Aircraft type galvanized steel cable
TIRES	15" Agricultural tires
BELT SIZE	3B270
TOP DRIVE	#80 Roller chain & hardened steel sprockets
TOP DRIVE BEARINGS	1 ¼" Pillow block
WINCH	Reduction gear with automatic brake
GEARBOX	Formed steel gears with tapered roller bearings
WHEEL TREAD	96"
GAS HORSEPOWER	40
CAPACITY	7,000 - 9,000 BPH

**DISCLAIMER:** The UTX series auger was proudly designed to handle dry, free-flowing grains up to a maximum density of 65 lb/bu (52 lb/cf). Any usage of this auger outside of this is not authorized by AGI

DISCHARGE CLEARANCE DIMENSIONS		TRANSPORT DIMENSIONS	
MIN	9' 6"	LENGTH	45' 6"
MAX	18' 1"	WIDTH	8'
HEIGHT	10' 6"	HEIGHT	10' 6"

WEIGHT		HOPPER DIMENSIONS	
HITCH WEIGHT (W/ ENGINE)	472 LBS	A - HOPPER LENGTH	37 ½"
TOTAL WEIGHT (W/ ENGINE)	3,058 LBS	B - HOPPER WIDTH	29 ¾"
HEIGHT	10' 6"	C - CANVAS OPENING LENGTH	34 ⅛"
		D - CANVAS OPENING WIDTH	37 ¾"
		E - COLLAPSED HEIGHT	15 ⅝"

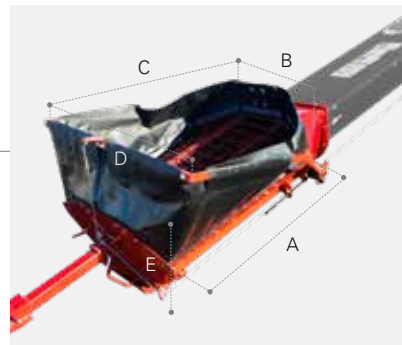



**HUTCHINSON is an AGI Brand.**

AGI is a leading provider of equipment solutions for agriculture bulk commodities including seed, fertilizer, grain, and feed systems with a growing platform in providing equipment and solutions for food processing facilities. AGI has manufacturing facilities in Canada, the United States, the United Kingdom, Brazil, India and Italy and distributes its products globally.

**AGI  HUTCHINSON**

198 Commerce Drive, Winnipeg, Manitoba, Canada R3P 0Z6  
1.855.432.1990 | [aggrowth.com/hutchinson](http://aggrowth.com/hutchinson)

AGGROWTH.COM    [aggrowthintl](#)    [▶](#) [🐦](#) [in](#) [f](#) [o](#)