




# SPIROMIX TUBE

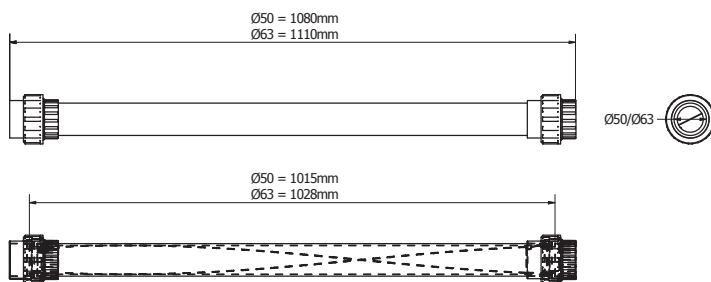

SKIOLD MAKES THE DIFFERENCE!

| TECHNICAL INFORMATION:      |                                                                                                                                                                                                                                              |                                 |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Item numbers                | 305 050 000                                                                                                                                                                                                                                  | 305 063 000                     |
| Item text                   | Spiromix tube PVC Ø50 PN10 cpl.                                                                                                                                                                                                              | Spiromix tube PVC Ø63 PN10 cpl. |
| L x W x H                   | 1080 x 78 x 78 mm                                                                                                                                                                                                                            | 1110 x 95 x 95 mm               |
| Build-in lenght             | 1015 mm                                                                                                                                                                                                                                      | 1028 mm                         |
| Transportweight             | 1,8 kg                                                                                                                                                                                                                                       | 2,3 kg                          |
| Flowspeed                   | 1 - 8 kg/s                                                                                                                                                                                                                                   | 1 - 8 kg/s                      |
| Temperature Range           | 4 - 50° C                                                                                                                                                                                                                                    | 4 - 50° C                       |
| Pressure Range (feed)       | 2 - 4 bar                                                                                                                                                                                                                                    | 2 - 4 bar                       |
| Connections                 | Ø50 mm feeding tube                                                                                                                                                                                                                          | Ø63 mm feeding tube             |
| Material (Tubes and Unions) | PVC                                                                                                                                                                                                                                          | PVC                             |
| Material (Liner)            | Stainless Steel (AISI 304)                                                                                                                                                                                                                   | Stainless Steel (AISI 304)      |
| Placement                   | 1 pcs. "spiromix" for every app. 50 m on longer, straight pipelines (not on the first app. 50 m after the feedpump, or on the first app. 15 m after corners).<br>By strongly seperative feedsorts they must be placed at a shorter interval. |                                 |